


Polytron® K-2

The NO EXCUSES Seal Strips!

- Strong
- Flexible
- Not brittle
- Easy to install
- Fiber-reinforced
- Built-in wear gauges
- Excellent wear properties
- Rapid shipping turnaround
- Lightweight - easy to handle
- Resistant to harsh chemicals
- Best value on the market
- Self-lubricating

Polytron® K-2 has been used in the market since 1983 all over the world. The most distinguishing characteristic of the material is the patented Teflon® Lubricator bar machined into the wear surface.

Water Proof Weather Proof Wear Proof UV Proof

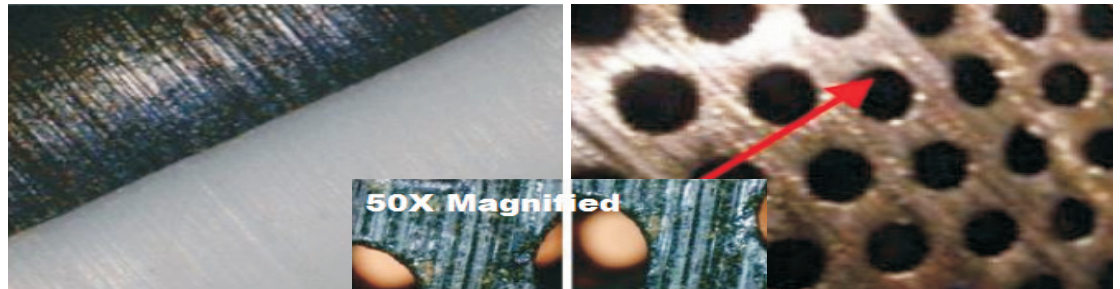

Teflon® Lubrication Bar Advantages:

RAPID BREAK-IN

A small lip of Teflon® above the base material wears in side the shell and conforms to any irregularities that are within the shell.

WEAR GAUGE

The Teflon® is installed 0.375"/10mm in the material. This helps to accurately measure the wear of the material during maintenance.


LUBRICATION

The combination of the Teflon® strip and the graphite within the matrix, assures proper continual lubrication from startup to shut down!

ENERGY SAVINGS

The Graphite as well as the Teflon® strip makes the coefficient of kinetic friction the lowest material made, thus reducing the mill Energy Costs

**Polytron® K-2 Suction Roll Rebuild Kit Consists of:
K-2 Seals, K-2 End Deckles & PolyTube® Airload Tubes**

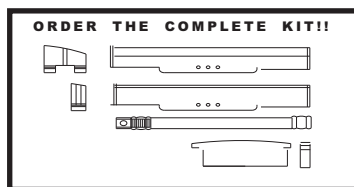

www.sawyerplastics.com

Inquiries info@sawyerplastics.com

100 Enterprise Street West Monroe, Louisiana 71292 USA

+ 318.325.4376 FAX + 318.325.5734

SAWYER
INDUSTRIAL INC.

MATERIALS MANUFACTURER